



Your smart doorbell is connecting. Wait until 100% complete.

10. Once connected you'll get a menu **'Device added successfully'**. Select the room your device is to be located. You can click on the pen to change the device name, then press **'Completed'**.



11. The smart device can now be controlled by the BrilliantSmart app.

12. If smart doorbell setup is unsuccessful click **'How to set the indicator to flash quickly or with a prompt tone'** and follow the steps to reset smart camera.



13. Select **'Otherwise'** in top right corner.

14. Select **'SmartConfig'** then go to 'BrilliantSmart App Assistance'.

Go to www.brilliantsmart.com.au for full instructions and features.

Warning

1. BrilliantSmart app screens may differ due to application updates & improvements.
2. Please use the device as per instructions.
3. To prevent injury DO NOT open or tamper with internals of this device
4. Power surge/power loss could possibly reset smart device. If this happens follow setup instructions.

NB: BrilliantSmart app screens may differ due to application updates & improvements.

Disposal

Please dispose of this packaging and product thoughtfully once it has passed its useful life. When your smart device comes to the end of its life or you choose to update or upgrade it, please do not dispose of it with your normal household waste. Please recycle where facilities exist.

When disposing of this fitting, check with your local authority for suitable options.

Warranty

Brilliant Lighting warrants this product against defects in manufacture and workmanship for a period of 12 months from date of purchase. Warranty does not include damage or loss arising from incorrect installation, operation or maintenance of this product, damage caused through modification, or incorrect installation.

Our goods come with guarantees that cannot be excluded under the Australian Consumer Law. You are entitled to a replacement or refund for a major failure and compensation for any other reasonably foreseeable loss or damage. You are also entitled to have the goods repaired or replaced if goods fail to be of acceptable quality and the failure does not amount to a major failure.

Any claim under this warranty must be made within 12 months of the date of purchase of the product.

Refer to our website brilliantlighting.com.au for terms and conditions and warranty claims.

This warranty is given by:

Brilliant Lighting (Aust) Pty. Ltd.
ABN 37 006 203 694
956 Stud Road Rowville, VIC 3178
Phone: 03 9765 2555

Email: warranty@brilliantlighting.com.au
MADE IN CHINA

Troubleshooting

Problem:
Smart device does not switch ON

Possible Cause	Suggested Solution
No Mains Power	Check connections, fuses and switches

Problem:
Cannot link smart device with BrilliantSmart app

Possible Cause	Suggested Solution
1. Modem signal weak	Place device and modem closer together
2. Router/modem/smart phone firewall is enabled	Disable firewalls on all devices
3. Internet connection is down	Contact your provider
4. BrilliantSmart app not installed correctly	Remove app and re-install

For any other problems connecting your smart device to BrilliantSmart app please visit:
www.brilliantsmart.com.au/faqs

Brilliant Lighting
956 Stud Road
Rowville Vic 3178 Australia
www.brilliantlighting.com.au
Australian Sales
T 03 9765 2555
T 1800 817 754 (interstate only)
F 03 9763 0277
E warranty@brilliantlighting.com.au
New Zealand Sales
T 09 974 9618
E sales@brilliantlighting.co.nz



WiFi Doorbell
20761




Works with
IFTTT

**NO HUB
REQUIRED**

USER MANUAL

Box content

Smart Doorbell x 1
User Manual x 1
Rechargeable Battery 18650 X 2
Installation Screw x 4
Screw Driver x 1
Hexagon socket head screw x 2
Allen Key x 1
Hardwiring cable x 2
USB Charger Cable x 1
Hardware Terminal Screws x 2

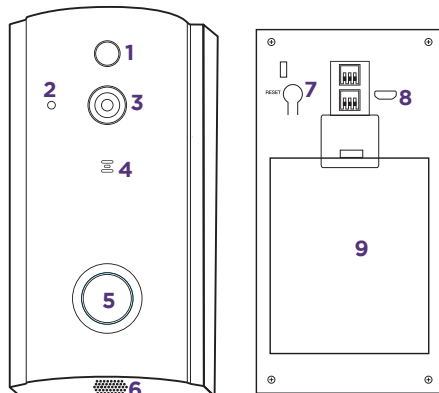

- 1 PIR motion sensor
- 2 Light sensor
- 3 HD camera
- 4 Microphone
- 5 Push button
- 6 Speakers
- 7 Reset button
- 8 Micro USB port (battery charging)
- 9 Battery compartment cover

Technical Specifications

Model No: 20761

Working voltage: AC 14V–24V or 2 pcs 18650 Rechargeable Batteries

Warranty: 1 year

Security: Mac Encryption; WEP/WAPI/TKIP/AES

WiFi Standard: IEEE802.11b/g/n

System Req's: iOS 8.0 or higher, Android 4.1 or higher


Camera: 1080P

Memory Card: Max 64GB (not included)

Installation


BEFORE INSTALLATION, PLEASE CHECK THAT THE LOCATION OF THE SMART DEVICE IS WITHIN RANGE OF YOUR HOME WIFI AND SIGNAL IS STRONG.

Step 1: Install the back plate on the wall

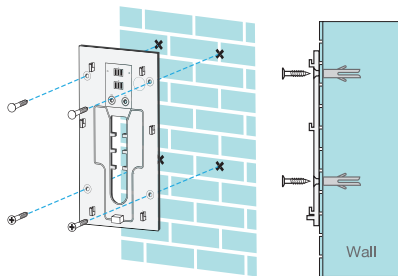


Step 2: Put 2 x 18650 batteries into doorbell.

Attention: After installing the batteries, please charge the doorbell via USB port for at least 6 hours.




Step 2: For hard wiring installation, please make sure your existing transformer is AC 14V–24V.

Use 2 x hard wire screws to fix 2 x hardwire cables to the power terminals on mounting bracket. Connect to your existing AC 14V–24V transformer.



Step 3: To fix the doorbell on the wall, align doorbell with bracket, push against wall. Then push downwards to lock. Finally insert 2 x hexagon head screws to secure.




Connect to your WiFi

Ensure your mobile phone is connected to your 2.4GHz WiFi network.

Your mobile phone and your smart device needs to be within good signal strength range of your WiFi router. (Refer to your router specifications for max range.)

Download the BrilliantSmart App

Please download the free BrilliantSmart app from the App store or Google Play store, or scan the QR code below.




Register the BrilliantSmart App

Open the BrilliantSmart app. For new users, register a new account or if existing user, login with your user name and password.

Configure your BrilliantSmart App

Setting up your Home


You can setup multiple homes or locations. Click **'Add Home'** button. Or click on **'Home'** top left if you are adding or modifying details then **'Home Management'** to setup your home(s), add or rename rooms and share devices.



Add your Smart Device to your App

- On initial power-on, the doorbell button will start blink slowly in BLUE colour and be ready to pair (1 times per second).
(If smart device does not automatically start blinking, press the reset button for 5 seconds until you hear voice instruction, then release pressing.)
- Open the BrilliantSmart App, tap **'Add Device'** (if empty room) or **'+'** to add your smart device.
- Select **'Smart Camera'** in the list of devices then press **'next step'**.
- Turn on power adapter at power outlet.
- After approximately 15 seconds your Smart doorbell will now say **'Camera Start'** then **'Please Config Network'**.


6. Power indicator on camera will now start to blink. If smart doorbell is blinking then press **'Confirm light blinks rapidly'**. Continue following connection guide.



7. Enter your WiFi password



8. Once connected to your home WiFi, scan the **'QR Code'** with smart camera. Hold **'QR Code'** approx. 20 cm in front, facing the smart doorbell camera lens.



9. Wait for **'Camera Configured'** then select **'Heard the Beep'**. Smart doorbell will now start connecting to app.