

CR6U61001/CR6U61002
CR9U61001/CR12U51001



SPACE-EFFICIENT WALL MOUNT ENCLOSURE

Space-saving wall mount enclosure with hex perforated design for optimal airflow


Ideal for data center and back office solutions, the standard 19" Swing-out Wall Mount Enclosure Series is capable of mounting and safeguarding multiple rack equipment, allowing simple management for users. The front door, rear door and side panels are removable with keyed-alike locks. The front door's reversible design allows users to choose the door's direction to open. Furthermore, the front and rear doors are hex-perforated to enable optimal airflow. Optional caster kit allows users to move the enclosure to desired location.

SERIES FEATURES

- Square and #12-24 Threaded Mounting Holes
- Adjustable Mounting Depth
- Hexagonal Perforated to Enhance Ventilation Capability
- Doors and Side Panels with Keyed-alike Locks
- Easy Cable Access Top and Bottom
- Removable Door(s) and Side Panels
- Reversible Front Door
- Rack U Numbering
- Flexible Enclosure Configuration
- Integrated Grounding Points
- Optional Caster Kit for Mobility
- Optional Fan Kit for Increasing Ventilation

PRODUCT CALLOUTS

1. Removable, Reversible, Lockable and Hexagonal Perforated Front Door
2. Removable, Lockable and Hexagonal Perforated Side Panels
3. Swing-out Rear Door
4. Cable Access with Removable Covers
5. Vents for Optional Fan Kit
6. Depth-adjustable Rack Angles with Dual Mounting Holes
7. Rack U Numbering
8. Reserved Holes for Optional Caster Kit

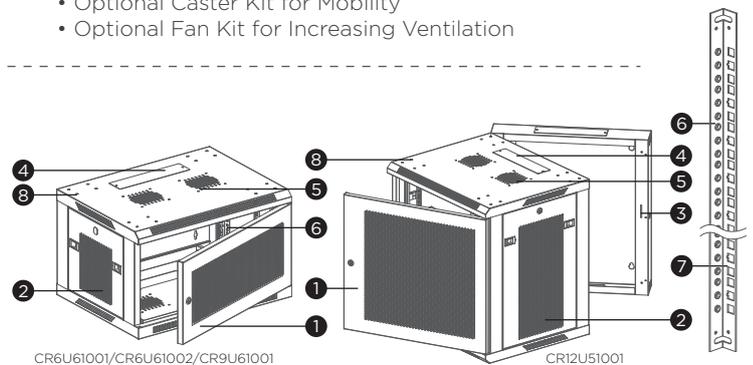

TECHNICAL SPECIFICATIONS

Model Name	CR6U61001	CR6U61002	CR9U61001	CR12U51001
Physical Details				
Rack Height (U)	6	6	9	12
Rack Door Type	Perforated Metal Door	Perforated Metal Door	Perforated Metal Door	Perforated Metal Door
Wall Mount Rear Frame	-	-	-	Swing Out
Equipment Mounting Hole Type	Dual Mounting Hole (Square and #12-24)			
Weight Capacity - Stationary (kg)	60	60	60	60
Maximum Mounting Depth (cm)	56.2	41.2	56.2	46.2
Dimensions (WxHxD) (cm)	60 x 37.2 x 60	60 x 37.2 x 45	60 x 50.5 x 60	60 x 63.7 x 60
Weight (kg)	16.9	13.3	18.9	27.3 kg
Management				
Invertible Enclosure	Yes	Yes	Yes	Yes
Rolling Casters	Optional	Optional	Optional	Optional
Removable Door(s) and Side Panels	Yes	Yes	Yes	Yes
Reversible Front Door	Yes	Yes	Yes	Yes
Lockable Doors and Side Panels	Yes, Keyed-alike	Yes, Keyed-alike	Yes, Keyed-alike	Yes, Keyed-alike
Rack U Numbering	Yes	Yes	Yes	Yes
Ventilation	Perforated Door and Side Panels with Ventilated Top and Bottom			
Heat Dissipation	Optional Fan Kit	Optional Fan Kit	Optional Fan Kit	Optional Fan Kit
Cable Management	Optional Cable Managers	Optional Cable Managers	Optional Cable Managers	Optional Cable Managers
Cable Access	Top and Bottom	Top and Bottom	Top and Bottom	Top and Bottom
Integrated Grounding	Yes	Yes	Yes	Yes
Certifications				
Certifications*	CE	CE	CE	CE
Approvals	DIN41491, DIN41494, EIA/ECA-310-E, IEC 60297-3-100, RoHS			
PCI DSS Compliant	Yes	Yes	Yes	Yes

*Certifications may vary according to different regions. Visit www.cyberpower.com for more information.
#All specifications are subject to change without notice.