


# 27MK430H

MK4 SERIES

## KEY FEATURES

- Full HD (1920 x 1080) IPS panel
- RADEON AMD Freesync™
- OnScreen Control
- Tilt Adjustment
- VESA Mountable

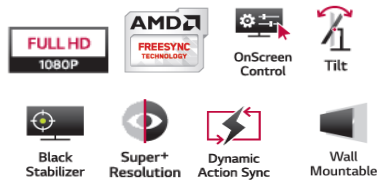

## PRODUCT FEATURES

### PANEL

Screen Size	27" (69cm)
Panel Technology	IPS
Aspect Ratio	16:9
Resolution	1920 x 1080
Brightness	250cd/m <sup>2</sup> (Typ.) 200cd/m <sup>2</sup> (Min.)
Contrast Ratio	1000:1 (native)
Response Time (GTG)	5ms
Viewing Angle (H x V)	178° x 178°
Number of Colours	16.7M colours
Colour Gamut (CIE1931)	NTSC 72%
Surface Treatment	Anti-glare, 3H

### CONNECTIVITY

Input (Rear)	
Digital	HDMI (ver1.4)
Analogue	D-Sub
Output (Rear)	
Audio	Headphone Out

### ENVIRONMENT CONDITIONS

Operation Temperature	0°C - 40 °C
Operation Humidity	Less than 80%

### ACCESSORIES

Power cable, HDMI cable

### WARRANTY

3 Years (Parts & Labour)

### PHYSICAL SPECIFICATIONS

With stand (WxDxH)	626mm x 204mm x 469mm
Without stand (WxDxH)	626mm x 44mm x 375mm
Carton (WxDxH)	709mm x 159mm x 459mm
With stand Weight (kg)	4.6 kg
Without stand Weight (kg)	4.2 kg
Packed Weight (kg)	6.1 kg
VESA™ Standard Mount Interface	100mm x 100mm

### STANDARD (CERTIFICATION)

Comparative Energy Consumption	86 kWh / year
Star Rating	5 ½ (Stars)
Active Standby	0.26W
Safety	CB Scheme, RCM
ErP/US EPA	Yes / Yes
EMC	RCM, Class (B)

### SPECIAL FEATURES

Picture Mode, Super Resolution+, DFC, Gamma Control, R/G/B Colour Control, Radeon Freesync™, Automatic Standby, Black Stabiliser, DAS Mode, Crosshair, OnScreen Control(2.0) DDC/CI, HDCP (Digital Port Only, ver1.4), OSD Lock, Auto Adjustment (D-sub Only)

Stand Tilt -5° (Front) ~ 20° (Rear)

### POWER

Power Supply	100 ~ 240V, (50/60Hz)
Power Consumption	25W (EPA), 28W (typ.)
Sleep Mode	Under 0.3W
Off Mode	Under 0.3W
Power Type	AC Adapter

\*LED LCD Monitors combine LCD screen with LED back light technology

Disclaimer: All product specifications correct at time of printing. Specifications may change without prior notice.

