
### BlueAnt



## **Dolby** Audio

# MORE BASS MORE SPACE

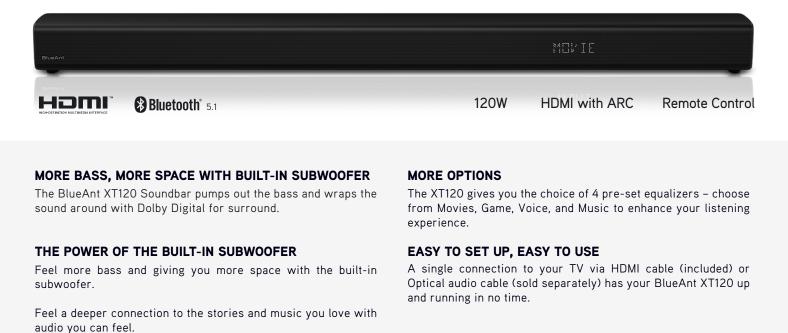

# ORE BASS MORE SPACE WITH INBUILT **SUBWOOFER**

BlueAnt



NBUILWOOT







LED Display

Remote Contro

32492 A

### BlueAnt



- Built-in Subwoofer
- EQ modes built-in and customisable
- Full function remote
- Dolby Digital Surround Sound

#### **Tech Specs**

- HDMI out with ARC
- Bluetooth<sup>®</sup> 5.1
- Coaxial input
- Optical input
- AUX input
- USB for MP3 playback

#### Soundbar

- Power Supply AC100-240V ~ 50/60Hz
- Power Consumption 30W < 0.5 W (Standby)</li>
- Speakers Impedance
- USB

- 4Ω x 2 5V 500mA Hi-Speed USB (2.0) FAT32/
- FAT16 32G (max), MP3
- Audio Input Sensitivity 500mV
- Frequency ResponseDimension (WxHxD)
- 40Hz 20Hz
- Net Weight
- 950 x 76 x 106 mm 2.5 kg

#### Bluetooth

- Bluetooth V 5.1 (A2DP, AVRCP)
  Version/Profiles
- Bluetooth (10 dBm Maximum power transmitted (EIRP)
- Bluetooth 2402 MHz ~2480 MHz Frequency Bands

#### Amplifier (RMS Output Power)

Total	120W
Soundbar	30W x 2 + 60W (Built-in
	Subwoofer)

#### **Remote Control**

Distance/Angle	6m / 30°
Battery type	AAA (1.5V x 2)

#### WHAT'S IN THE BOX

1 x XT120 Soundbar
1 x Power Cable
1 x Remote Control with batteries
1 x HDMI 2.0 Cable
1 x AUX Cable

Mounting brackets with screws

**■●●■■** Atmos

#### НЭШ

HDMI with eARC



#### **KEY FEATURES**

- 2.1CH with Built in Subwoofer
- Dolby Digital
- Dolby Vision Compatible
- HDMI ARC with CEC
- AUX / Bluetooth 5.1

- Optical / Coaxial / USB playback
- LED indicator
- Metal Grill and High-gloss cabinet
- Output Power: 30W RMS x2 + 60W = 120W
- Accessories: Remote Control, Power Cord, HDMI2.0 cable, Wall-mount brackets, User Manual